

# FLASH 5™

Fast Loading Accessible Shell Holder

## INSTALLATION INSTRUCTIONS

 **Phillips Screwdriver Required For Assembly**

**WARNING:** When installing Phillips head screws, avoid over-tightening as this could cause damage to the stock and screw.

**Package Contents:** (1) TactaLoad FLASH-5 Shotgun Buttstock, (1) Recoil Pad, (1) Bag Mounting Fasteners, (1) Allen Wrench



1 1/4 in. Screw



3/4 in. Screw



Flat Washer



Split Washer



or\*



Socket Head Cap Screw

**\*NOTE:** Your FLASH-5 hardware bag will include only one of these 2 bolts.



### WARNING

You **MUST** remove all ammunition from within the firearm and engage the safety before proceeding.

**START  
HERE**


### Step 1

#### Remove current gunstock:

(a.) Using a Phillips head screwdriver, remove the recoil pad from the shotgun.

Once the recoil pad is removed,

(b.) use a flat head screwdriver or appropriate socket to remove the stock bolt from the shotgun. Remove stock.

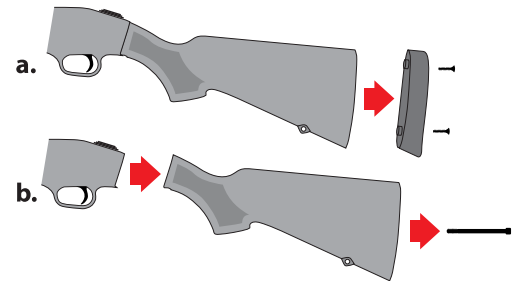


### Step 2

#### At the rear of the FLASH-5 stock:

(a.) remove the rear insert and

(b.) the 8-32 x 1/2" Phillips Head screw. Set insert and screw aside.

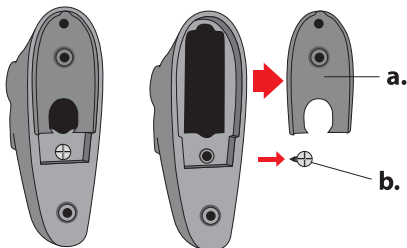

### Step 3

Remove the entire magazine assembly from the stock and set aside.

