

FLASH 5™

Fast Loading Accessible Shell Holder



NEED HELP?
Visit TactaLoad.com/support
for video guided instructions

INSTALLATION INSTRUCTIONS

Phillips Screwdriver Required For Assembly

WARNING: When installing Phillips head screws, avoid over-tightening as this could cause damage to the stock and screw.

Package Contents: (1) TactaLoad FLASH-5 Shotgun Buttstock, (1) Recoil Pad, (1) Bag Mounting Fasteners, (1) Allen Wrench



a 1 1/4 inch Phillips Head Screw (Qty. 2)



b 3/4 inch Phillips Head Screw (Qty. 2)



c Flat Washer



d Split Washer



Socket Head Cap Screw

***NOTE:** Your FLASH-5 hardware bag will include only one of these 2 bolts.

WARNING
You **MUST** remove all ammunition from within the firearm and engage the safety before proceeding.

START HERE


Step **1**

Remove current gunstock:

(1.) Using a Phillips head screwdriver, remove the recoil pad from the shotgun.

Once the recoil pad is removed,


(2.) use a flat head screwdriver or appropriate socket to remove the stock bolt from the shotgun. Remove stock.

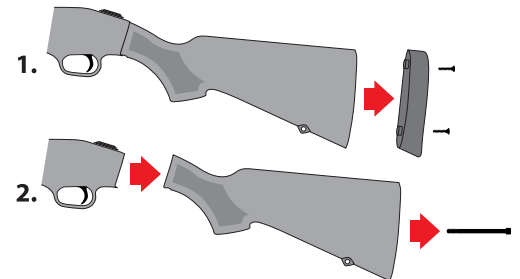

Step **2**

At the rear of the FLASH-5 stock:

(1.) remove the rear insert and
(2.) remove the 8-32 x 1/2" Phillips head screw. Set insert and screw aside.

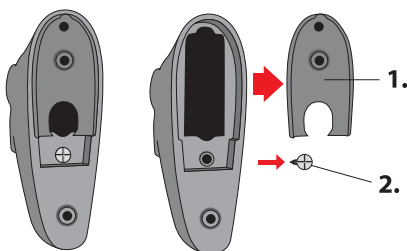

Step **3**

Remove the entire magazine assembly from the stock and set aside.

